

04

LIGHT DUTY STAINLESS STEEL




For light-duty applications where frequent washdowns are necessary. Ideally suited for applications exposed to cleaning agents, steam, caustic solutions, or other corrosive agents which could cause rust or corrosion.

TYPICAL APPLICATIONS

- Food Service
- Pharmaceuticals
- Laboratories
- Hospitals

MOUNTING PLATE



FEATURES

- **Top Plate & Yoke:** Heavily embossed, Type 304 formed stainless steel to extend caster life under rugged conditions
- **Swivel Section:** Double stainless steel ball bearing raceways to resist wear and improve maneuverability
- **Finish:** "Polished" stainless steel finish maintains appearance in severe conditions
- **Kingpin:** 1/2" hydraulically formed stainless steel rivet
- **Axle:** 3/8" diameter Type 304 stainless steel hollow axle with lock nut
- **Component Parts:** Bushing, axle and nut are all stainless steel
- **NSF Listed** for food service industry
- Alternate or custom caster configurations available

RIG OPTIONS

- **Sealed swivel** specify **SS01**
- **NSF** listed for food industry consult factory

Grip Lock specify GL



BEARING OPTIONS




Face Contact specify F

BEARING OPTIONS



• Polished Stainless Steel
• Perfect for Washdown and Corrosive Environments

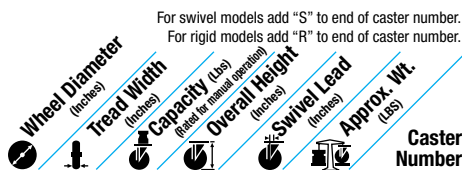

Soft Rubber (41 Plain Bore)

Wheel Diameter (inches)	Tread Width (inches)	Capacity (Lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (Lbs)	Caster Number
3	1 1/4	125	4 1/4	1 5/16	1.50	04RR03041
3 1/2	1 1/4	150	4 11/16	1 1/4	1.75	04RR03X41
4	1 1/4	150	5 1/8	1 1/4	2.25	04RR04041
5	1 1/4	175	6 3/16	1 1/2	2.63	04RR05041

RR

Hard Rubber (41 Plain Bore)

Wheel Diameter (inches)	Tread Width (inches)	Capacity (Lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (Lbs)	Caster Number
3	1 1/4	300	4 1/4	1 5/16	1.50	04RN03041
3 1/2	1 1/4	350	4 11/16	1 1/4	2.00	04RN03X41
4	1 1/4	350	5 1/8	1 1/4	2.50	04RN04041
5	1 1/4	350	6 3/16	1 1/2	2.63	04RN05041

RN


X-tra Soft Rubber Flat Tread (51 Delrin Bearing)*

Wheel Diameter (inches)	Tread Width (inches)	Capacity (Lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (Lbs)	Caster Number
3	1 1/4	200	4 1/4	1 5/16	1.50	04XS03051
3 1/2	1 1/4	250	4 11/16	1 1/4	1.75	04XS03X51
4	1 1/4	300	5 1/8	1 1/4	2.50	04XS04051
5	1 1/4	325	6 3/16	1 1/2	2.63	04XS05051

XS

Prevenz™ antimicrobial models available. Add PREV to end of caster number.

*Plain bore bearing available. Change "51" to "41" (Example: 04XS03041).

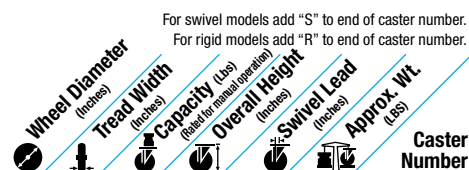

Precision X-tra Soft Round Tread (28 Precision Ball Bearing) NEW PRODUCT!

Wheel Diameter (inches)	Tread Width (inches)	Capacity (Lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (Lbs)	Caster Number
3	1 1/4	200	4 1/4	1 5/16	1.50	04XR03028
3 1/2	1 1/4	250	4 11/16	1 1/4	1.75	04XR03X28
4	1 1/4	300	5 1/8	1 1/4	2.25	04XR04028
5	1 1/4	325	6 3/16	1 1/2	2.63	04XR05028

XR

Polypropylene (51 Delrin Bearing)

Wheel Diameter (inches)	Tread Width (inches)	Capacity (Lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (Lbs)	Caster Number
3	1 1/4	250	4 1/4	1 5/16	1.50	04PB03051
3 1/2	1 1/4	300	4 11/16	1 1/4	1.75	04PB03X51
4	1 1/4	350	5 1/8	1 1/4	2.13	04PB04051
5	1 1/4	350	6 3/16	1 1/2	2.63	04PB05051

PB

Continue on next page

04

LIGHT DUTY STAINLESS STEEL

Continued from previous page

For swivel models add "S" to end of caster number.
For rigid models add "R" to end of caster number.

Wheel Diameter (Inches)	Tread Width (Inches)	Capacity (Lbs) (Based on manual operation)	Overall Height (Inches)	Swivel Lead (Inches)	Approx. Wt. (Lbs)	Caster Number
----------------------------	-------------------------	---	----------------------------	-------------------------	----------------------	------------------

Polyurethane on Polypropylene (51 Delrin Bearing)

3	1 1/4	300	4 1/4	1 5/16	1.50	NEW PRODUCT! 04XA03051
3 1/2	1 1/4	350	4 11/16	1 1/4	1.75	04XA03X51
4	1 1/4	350	5 1/8	1 1/4	2.50	04XA04051
5	1 1/4	350	6 3/16	1 1/2	2.75	04XA05051

XA Prevenz™ antimicrobial models available. Add PREV to end of caster number.

PEMCO QUIETKAT TPE Flat Tread (28 Precision Ball Bearing)*

3 1/2	1 1/4	350	4 11/16	1 1/4	1.75	NEW PRODUCT! 04QQ03X28
4	1 1/4	350	5 1/8	1 1/4	2.50	04QQ04028
5	1 1/4	350	6 3/16	1 1/2	2.75	04QQ05028

*Plain bore (41) bearing available. Change "28" to bearing "41".
Example for Plain: 04QQ03X41

QQ

PEMCO QUIETKAT TPE Round Tread (28 Precision Ball Bearing)*

4	1 1/4	350	5 1/8	1 1/4	2.50	NEW PRODUCT! 04QR04028
5	1 1/4	350	6 3/16	1 1/2	2.75	04QR05028

*Plain bore (41) bearing available. Change "28" to bearing "41".
Example for Plain: 04QR04041

QR

PEMCO POLYKAT Polyurethane (28 Precision Ball Bearing)*

3 1/2	1 1/4	350	4 11/16	1 1/4	1.75	NEW PRODUCT! 04QP03X51
4	1 1/4	350	5 1/8	1 1/4	2.50	04QP04051

*Plain bore (41) bearing available. Change "28" to bearing "41".
Example 04QP03041

QP

For swivel models add "S" to end of caster number.
For rigid models add "R" to end of caster number.

Wheel Diameter (Inches)	Tread Width (Inches)	Capacity (Lbs) (Based on manual operation)	Overall Height (Inches)	Swivel Lead (Inches)	Approx. Wt. (Lbs)	Caster Number
----------------------------	-------------------------	---	----------------------------	-------------------------	----------------------	------------------

Phenolic (41 Plain Bore)

3	1 1/4	350	4 1/4	1 5/16	1.50	04TM03041
3 1/2	1 1/4	350	4 11/16	1 1/4	2.00	04TM03X41
4	1 1/4	350	5 1/8	1 1/4	2.50	04TM04041
5	1 1/4	350	6 3/16	1 1/2	2.75	04TM05041

TM

Hi-Temp Phenolic (41 Plain Bore)

4	1 1/4	300	5 1/8	1 1/4	2.50	04TR04041
5	1 1/4	325	6 3/16	1 1/2	2.75	04TR05041

TR

Prevenz™ Antimicrobial Wheels

The EPA registered and FDA compliant antimicrobial additive used in Prevenz™ wheels is designed to suppress the growth of a variety of destructive and odor causing microbes including bacteria, molds, mildew and fungi. These wheels are suitable for a variety of applications including medical equipment, food equipment, pharmaceutical, chemical, meat & poultry, processing plants and more. To order add "PREV" to end of caster number.



XA Prevenz™
Polyurethane on
Polypropylene



XS Prevenz™
X-trasoft Rubber
Flat Tread