

W25 Series

Swivel Top Plate

Capacity to 220 pounds each





5-W25-513 PLT 2
(shown in photo)

FEATURES

- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 3/8" diameter bolt with lock nut.

CASTER OPTIONS

- ✓ **Bright Nickel Plating:** to order, add "5" to body of model number. (Example: 5-W255-103)
- ✓ **PosiLoc® Brake:** all stainless steel construction. To order, add "PL" to end of model number (not available on 2-1/2" wheel models). 
- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number. 

MOUNTING OPTIONS

Top Plate Sizes: to order, add Plate Mounting Code to end of model number. (Example: 5-W25-103 **PLT 2**). Note: Rigid casters available in **PLT 4** only.

| Mounting Code | Top Plate Size | Bolt Hole Spacing | Mounting Bolt Size |
|---------------|-------------------|-------------------|--------------------|
| PLT 1 | 2-7/16" x 2-7/16" | 1-3/4" x 1-3/4" | 1/4" |
| PLT 2 | 1-3/4" x 3" | 1" x 2-1/4" | 1/4" |
| PLT 4 | 2-3/8" x 3-5/8" | 1-3/4" x 3" | 5/16" |

WHEEL OPTIONS



| Wheel Diameter (Inches) | Tread Width (Inches) | Wheel Type | Bearing | Capacity (Pounds) | Swivel Top Plate Model Number | Approximate Weight (Pounds) | Load Height (Inches) | Swivel Radius (Inches) |
|-------------------------|----------------------|------------------------------------|-------------|-------------------|-------------------------------|-----------------------------|----------------------|------------------------|
| 3 | 1 1/4 | CUSHION RUBBER | DELTRIN | 110 | 3-W25-105 | 1-3/4 | 4 1/8 | 3 |
| | | CUSHION RUBBER | BALL | 110 | 3-W25-152 | 1-3/4 | | |
| | | HARD RUBBER | DELTRIN | 160 | 3-W25-106 | 1-3/4 | | |
| | | HARD RUBBER | BALL | 160 | 3-W25-162 | 1-3/4 | | |
| | | POLYOLEFIN | PLAIN | 180 | 3-W25-521 | 1-3/4 | | |
| | 1 1/2 | PHENOLIC | PLAIN | 220 | 3-W25-121 | 1-3/4 | | |
| 4 | 1 1/4 | CUSHION RUBBER | DELTRIN | 120 | 4-W25-105 | 2-3/8 | 5 1/8 | 3 1/2 |
| | | CUSHION RUBBER W/ SIDE PLATES | BALL | 120 | 4-W25-452 | 2-3/8 | | |
| | | WELDED DISC / BLACK RUBBER | BALL | 150 | 4-W25-113 | 2-1/2 | | |
| | | WELDED DISC / GREY RUBBER | BALL | 150 | 4-W25-113G | 2-1/2 | | |
| | | HARD RUBBER | DELTRIN | 180 | 4-W25-106 | 2-3/8 | | |
| | | HARD RUBBER W/ SIDE PLATES | BALL | 180 | 4-W25-462 | 2-3/8 | | |
| | | ADVANTAGE TPR / ROUND ¹ | BALL | 180 | 4-W25-213GD | 2-1/2 | | |
| | | WELDED DISC / POLYURETHANE | BALL | 200 | 4-W25-113P | 2-1/2 | | |
| | | POLYLOC / GREY ² | BALL | 200 | 4-W25-213G | 2-1/2 | | |
| | | POLYLOC / BLUE | BALL | 200 | 4-W25-213P | 2-1/2 | | |
| | | POLYOLEFIN | PLAIN | 200 | 4-W25-513 | 2-1/2 | | |
| | | ADVANTAGE TPR / FLAT ³ | BALL | 220 | 4-W25-213GF | 2-1/2 | | |
| | | ADVANTAGE HEAT ROUND | SS BALL | 220 | 4-W25-213RTR | 2-1/2 | | |
| | | ADVANTAGE HEAT FLAT | SS BALL | 220 | 4-W25-213RTF | 2-1/2 | | |
| | ADVANTAGE HEALTH | SS BALL | 220 | 4-W25-213MF | 2-1/2 | | | |
| 1 1/2 | PHENOLIC | PLAIN | 220 | 4-W25-121 | 2-1/2 | | | |
| 5 | 1 1/4 | CUSHION RUBBER | DELTRIN | 150 | 5-W25-105 | 2-3/4 | 6 1/4 | 4 |
| | | CONDUCTIVE CUSHION RUBBER | SINTERED | 150 | 5-W25-105C | 2-3/4 | | |
| | | CUSHION RUBBER | BALL | 150 | 5-W25-152 | 2-3/4 | | |
| | | CUSHION RUBBER W/ SIDE PLATES | BALL | 150 | 5-W25-452 | 2-3/4 | | |
| | | WELDED DISC / BLACK RUBBER | BALL | 150 | 5-W25-113 | 3 | | |
| | | WELDED DISC / GREY RUBBER | BALL | 150 | 5-W25-113G | 3 | | |
| | | ADVANTAGE TPR / ROUND ¹ | BALL | 180 | 5-W25-213GD | 3 | | |
| | | HARD RUBBER | DELTRIN | 200 | 5-W25-106 | 2-3/4 | | |
| | | HARD RUBBER | BALL | 200 | 5-W25-162 | 2-3/4 | | |
| | | HARD RUBBER W/ SIDE PLATES | BALL | 220 | 5-W25-462 | 2-3/4 | | |
| | | WELDED DISC / POLYURETHANE | BALL | 220 | 5-W25-113P | 3 | | |
| | | POLYLOC / GREY ² | BALL | 220 | 5-W25-213G | 3 | | |
| | | POLYLOC / BLUE | BALL | 220 | 5-W25-213P | 3 | | |
| | | POLYOLEFIN | PLAIN | 220 | 5-W25-513 | 3 | | |
| | | POLYOLEFIN | BALL | 220 | 5-W25-514 | 3 | | |
| | | ADVANTAGE TPR / FLAT ³ | BALL | 220 | 5-W25-213GF | 3 | | |
| | | ADVANTAGE HEAT ROUND | SS BALL | 220 | 5-W25-213RTR | 3 | | |
| | ADVANTAGE HEAT FLAT | SS BALL | 220 | 5-W25-213RTF | 3 | | | |
| ADVANTAGE HEALTH | SS BALL | 220 | 5-W25-213MF | 3 | | | | |
| 1 1/2 | PHENOLIC | PLAIN | 220 | 5-W25-121 | 3 | | | |

¹For delrin bearing change wheel code to 314GD. ²For delrin bearing change wheel code to 314G.


³For delrin bearing change wheel code to 314GF.

Model Numbers

Casters

Below model is a 5" wheel diameter 30 Series swivel caster with Flat Tread Advantage wheel with VertiLoc® brake.


5-30-213GF VL

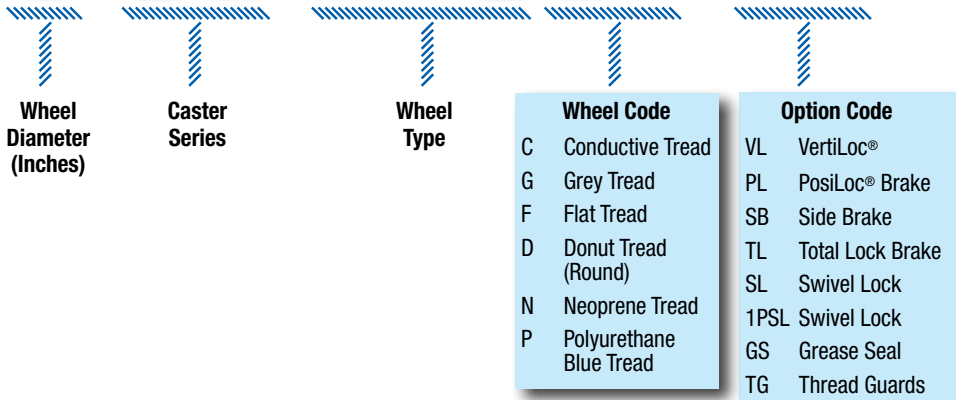

Wheels

Below model is a 5" wheel diameter Flat Tread Advantage wheel with ball bearing.

5-213GF

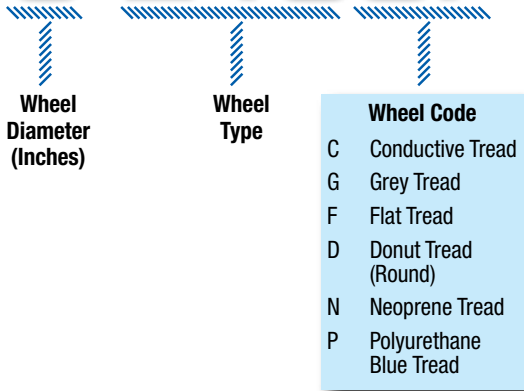

Forks

Below model is a 5" diameter 30 Series swivel fork.

5-30-000-PLT 2

