Stock Absorbing

SWIVEL


6


Load Capacity: 6,000 to 10,000 lbs.

Quality Features


Fabricated with a super heavy-duty three-spring system, this is our premium shock-absorbing caster for extremely heavy loads. Upper raceway top plate and base plate are flame cut from 1" thick steel and precisely machined by CNC lathe to very close tolerances and dimensions. Pressure fitting is supplied in base plate for lubrication. Both upper main load bearing and lower thrust bearing utilize heavy-duty tapered roller bearings for maximum mobility under heavy loads and to withstand lateral forces. Extra-large 1-1/4" king bolt is threaded and securely fastened at both ends to ensure a solid fit. The stud is welded to the top plate to prevent loosening, while the nut is tightened to exact specifications. Standard finish is Laguna Blue.

RIGID

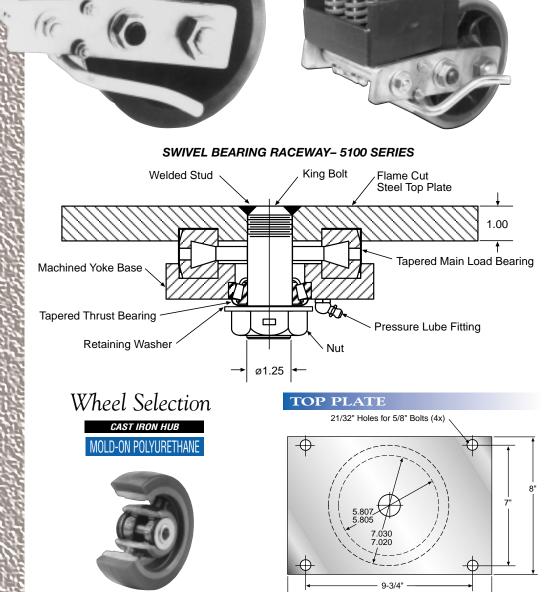

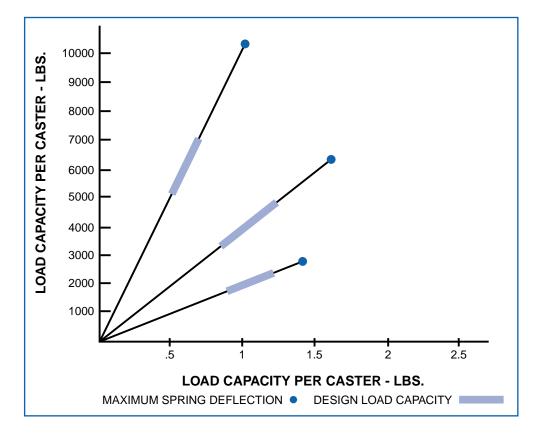


BRAKES



Wheel Brake

Operates by a foot pedal lever that has a rubber brake pad to form a positive brake action when the brake lever is pressed down to engage. To restore back to the normal position, simply reverse the action to disengage the brake. Easy to operate and trouble free. Four Position Swivel Lock & Wheel Brake (SL-WB)



Four Position Swivel Lock and Wheel Brake

A horizontal four position swivel lock with a spring-loaded plunger to securely hold the swivel in the slotted position desired. Plunger can be put into a neutral position for free swiveling action.

Diameter	Tread Width	Load Capacity	Wheel Material	Bearing	Swivel Part Number	Rigid Part Number	Approx. Weight	Overall Height	Swivel Radius
(\varnothing)					\bigcirc	$\overline{\mathbf{X}}$	LBS		
10	5	6000	POLYURETHANE / CAST IRON HUB	TAPERED ROLLER	5110-YADI-M-CI-6	5110-YRADI-M-CI-6	127	15-3/4	8-3/4
		7000			5110-YADI-M-CI-7	5110-YRADI-M-CI-7			
		8000			5110-YADI-M-CI-8	5110-YRADI-M-CI-8			
		9000			5110-YADI-M-CI-9	5110-YRADI-M-CI-9			
		10,000			5110-YADI-M-CI-10	5110-YRADI-M-CI-10			