

# P2 Precision Light Duty Casters




The smoothest operation available for light duty products. The sealed precision bearing in the swivel section offers quiet maintenance-free operation.


### TYPICAL APPLICATIONS

- Hotel Equipment
- Institutional Equipment
- Food Service
- Racks and Cases
- Stock Carts
- Laundry Trucks

### MOUNTING PLATE



### SWIVEL CROSS SECTION




### FEATURES

- **Top Plate & Yoke:** Heavily embossed, formed steel to extend caster life under rugged conditions.
- **Swivel Section:** Sealed precision bearing in swivel section
- **Axle:** 3/8" diameter hollow axle with lock nut.
- **Finish:** All rigs are zinc plated to resist rust and corrosion
- Alternate or custom caster configurations available

**BRAKE OPTIONS**  
Face Contact specify **F**



**Total Lock** specify **T**

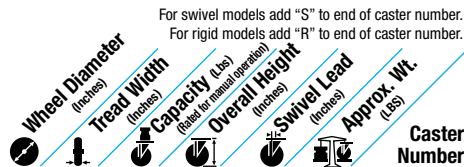

### X-tra Soft Rubber Round Tread (28 Precision Ball Bearing) **NEW PRODUCT!**

Wheel Diameter (inches)	Tread Width (inches)	Capacity (Lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (Lbs)	Caster Number
3	1 1/4	200	4 1/4	1 5/16	1.75	<b>P2XR03028</b>
3 1/2	1 1/4	250	4 11/16	1 1/4	1.85	<b>P2XR03X28</b>
4	1 1/4	250	5 1/8	1 1/4	2.25	<b>P2XR04028</b>
5	1 1/4	250	6 3/16	1 1/2	2.75	<b>P2XR05028</b>

**XR**

### X-tra Soft Rubber Flat Tread (31 Annular Ball Bearing)

Wheel Diameter (inches)	Tread Width (inches)	Capacity (Lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (Lbs)	Caster Number
3	1 1/4	200	4 1/4	1 5/16	1.75	<b>P2XS03031</b>
3 1/2	1 1/4	250	4 11/16	1 1/4	1.85	<b>P2XS03X31</b>
4	1 1/4	250	5 1/8	1 1/4	2.25	<b>P2XS04031</b>
5	1 1/4	250	6 3/16	1 1/2	2.75	<b>P2XS05031</b>

**XS**

### Polyurethane on Polypropylene (31 Annular Ball Bearing)

Wheel Diameter (inches)	Tread Width (inches)	Capacity (Lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (Lbs)	Caster Number
3	1 1/4	250	4 1/4	1 5/16	1.50	<b>P2XA03031</b>
3 1/2	1 1/4	250	4 11/16	1 1/4	1.50	<b>P2XA03X31</b>
4	1 1/4	250	5 1/8	1 1/4	2.25	<b>P2XA04031</b>
5	1 1/4	250	6 3/16	1 1/2	2.25	<b>P2XA05031</b>

**XA**

### Prevenz™ Antimicrobial Wheels

The EPA registered and FDA compliant antimicrobial additive used in Prevenz™ wheels is designed to suppress the growth of a variety of destructive and odor causing microbes including bacteria, molds, mildew and fungi. These wheels are suitable for a variety of applications including medical equipment, food equipment, pharmaceutical, chemical, meat & poultry, processing plants and more. To order add "PREV" to end of caster number.



XA Prevenz™  
Polyurethane on  
Polypropylene

XS Prevenz™  
X-trasoft Rubber  
Flat Tread

Prevenz™ antimicrobial models available. Add PREV to end of caster model.

Prevenz™ antimicrobial models available. Add PREV to end of caster model.