

W14 Series

Spring Ring Stem

Capacity to 220 pounds each





5-W14-213GD STEM 1
(shown in photo)

FEATURES

- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 3/8" diameter bolt with lock nut.

CASTER OPTIONS


- ✓ **Bright Nickel Plating:** to order, add "5" to body of model number. (Example: 5-W145-103)
- ✓ **PosiLoc® Brake:** all stainless steel construction. To order, add "PL" to end of model number (not available on 2-1/2" wheel models). 
- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number. 

MOUNTING OPTIONS

W14 Spring Ring Stem Sizes: to order, specify stem code number and add to end of caster model number (Example: 5-W14-213GD **STEM 1**). Machined stems and square stems available.

Mounting Code	Stem Sizes
STEM 1	7/16" diameter x 1- 3/8" long
STEM 2	7/16" diameter x 1- 15/16" long

W19 Octagon Stem Size: 3/4" octagon x 2" long with three cross drilled mounting holes 1/4" dia. To order change series code to **W17** (Example: 5-**W19**-213G).



WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Spring Ring Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3	1 1/4	CUSHION RUBBER	DELRIN	110	3-W14-105	1-3/4	3 5/8	2 3/4
		CUSHION RUBBER	BALL	110	3-W14-152	1-3/4		
		HARD RUBBER	DELRIN	160	3-W14-106	1-3/4		
		HARD RUBBER	BALL	160	3-W14-162	1-3/4		
		POLYOLEFIN	PLAIN	180	3-W14-521	1-3/4		
	1 1/2	PHENOLIC	PLAIN	220	3-W14-121	1-3/4		
4	1 1/4	CUSHION RUBBER	DELRIN	120	4-W14-105	2-3/8	4 5/8	3 5/16
		CUSHION RUBBER W/ SIDE PLATES	BALL	120	4-W14-452	2-3/8		
		WELDED DISC / BLACK RUBBER	BALL	150	4-W14-113	2-1/2		
		WELDED DISC / GREY RUBBER	BALL	150	4-W14-113G	2-1/2		
		HARD RUBBER	DELRIN	180	4-W14-106	2-3/8		
		HARD RUBBER W/ SIDE PLATES	BALL	180	4-W14-462	2-3/8		
		ADVANTAGE TPR / ROUND ¹	BALL	180	4-W14-213GD	2-1/2		
		WELDED DISC / POLYURETHANE	BALL	200	4-W14-113P	2-1/2		
		POLYLOC / GREY ²	BALL	200	4-W14-213G	2-1/2		
		POLYLOC / BLUE	BALL	200	4-W14-213P	2-1/2		
		POLYOLEFIN	PLAIN	200	4-W14-513	2-1/2		
		ADVANTAGE TPR / FLAT ³	BALL	220	4-W14-213GF	2-1/2		
		ADVANTAGE HEAT ROUND	SS BALL	220	4-W14-213RTR	2-1/2		
		ADVANTAGE HEAT FLAT	SS BALL	220	4-W14-213RTF	2-1/2		
	ADVANTAGE HEALTH	SS BALL	220	4-W14-213MF	2-1/2			
1 1/2	PHENOLIC	PLAIN	220	4-W14-121	2-1/2			
5	1 1/4	CUSHION RUBBER	DELRIN	150	5-W14-105	2-3/4	5 5/8	4
		CONDUCTIVE CUSHION RUBBER	SINTERED	150	5-W14-105C	2-3/4		
		CUSHION RUBBER	BALL	150	5-W14-152	2-3/4		
		CUSHION RUBBER W/ SIDE PLATES	BALL	150	5-W14-452	2-3/4		
		WELDED DISC / BLACK RUBBER	BALL	150	5-W14-113	3		
		WELDED DISC / GREY RUBBER	BALL	150	5-W14-113G	3		
		ADVANTAGE TPR / ROUND ¹	BALL	180	5-W14-213GD	3		
		HARD RUBBER	DELRIN	200	5-W14-106	2-3/4		
		HARD RUBBER	BALL	200	5-W14-162	2-3/4		
		HARD RUBBER W/ SIDE PLATES	BALL	220	5-W14-462	2-3/4		
		WELDED DISC / POLYURETHANE	BALL	220	5-W14-113P	3		
		POLYLOC / GREY ²	BALL	220	5-W14-213G	3		
		POLYLOC / BLUE	BALL	220	5-W14-213P	3		
		POLYOLEFIN	PLAIN	220	5-W14-513	3		
		POLYOLEFIN	BALL	220	5-W14-514	3		
		ADVANTAGE TPR / FLAT ³	BALL	220	5-W14-213GF	3		
		ADVANTAGE HEAT ROUND	SS BALL	220	5-W14-213RTR	3		
		ADVANTAGE HEAT FLAT	SS BALL	220	5-W14-213RTF	3		
		ADVANTAGE HEALTH	SS BALL	220	5-W14-213MF	3		
	1 1/2	PHENOLIC	PLAIN	220	5-W14-121	3		

¹For delrin bearing change wheel code to 314GD. ²For delrin bearing change wheel code to 314G.


³For delrin bearing change wheel code to 314GF.

Model Numbers

Casters

Below model is a 5" wheel diameter 30 Series swivel caster with Flat Tread Advantage wheel with VertiLoc® brake.


5-30-213GF VL

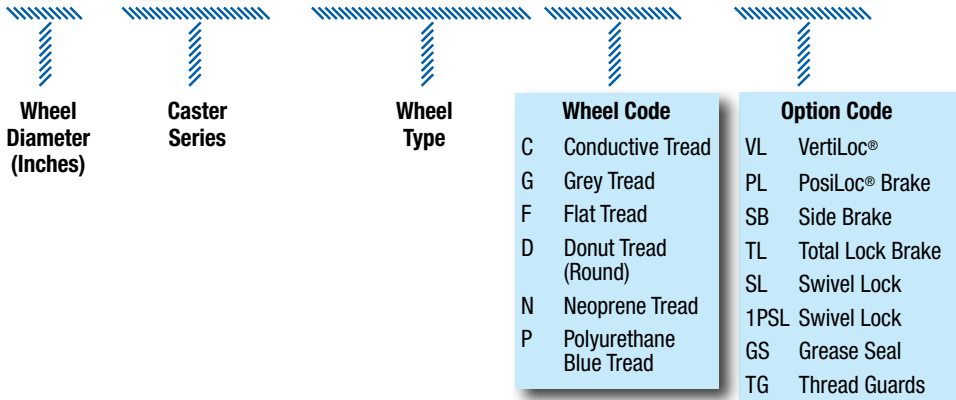

Wheels

Below model is a 5" wheel diameter Flat Tread Advantage wheel with ball bearing.

5-213GF

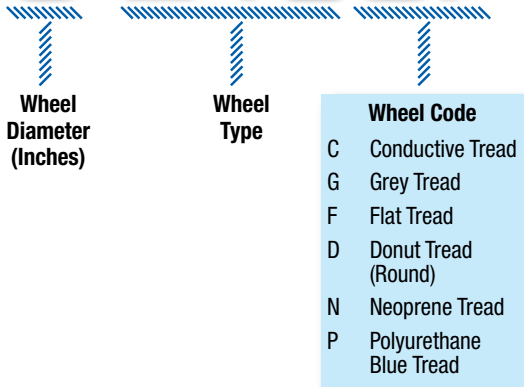

Forks

Below model is a 5" diameter 30 Series swivel fork.

5-30-000-PLT 2

