

700 lbs. Maximum Capacity

Mounting: Standard and Custom Stems Available (Consult Factory)




SSRT/BR-5200-EL-DEL
C/W SSRT STEM 1" x 4" PS



SSRTR/BR-5200-UN-DEL
C/W SSRT STEM 1" x 4" PS

This unique caster offers both the top quality construction and performance of our SS Series with the versatility of a stem caster. Equipped with 5/8" kingpin construction, heavy 1/4" leg material and all stainless steel material, this is an exceptional product. Our wide selection of standard and custom stainless steel stems mean that this caster can be mounted in virtually any application. We offer a large variety of wheel types and sizes to suit your many needs. North American made for fast delivery and competitive pricing and are fully customizable upon request.

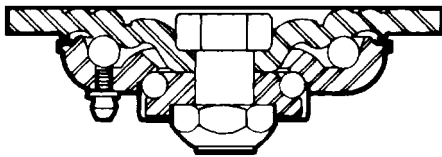

Cross-section illustrates the design of the generously proportioned upper and lower ball races, which ride on 5/16" and 1/4" diameter stainless steel ball bearings respectively.

| Wheel Diam. | OH | Swiv. Rad. |
|-------------|--------|------------|
| 3" | 4-3/8" | 2-3/4" |
| 3-1/4"* | 4-1/2" | 2-13/16" |
| 4" | 5-5/8" | 3-13/16" |
| 5" | 6-1/2" | 4-7/16" |
| 6" | 7-1/2" | 4-9/16" |
| 8" | 9-1/2" | 5-7/8" |

| Swivel Model Number | Rigid Model Number | Tread Width | Wheel Type | Capacity (lbs.) | Bearing Type | Weight (Approx) | |
|---------------------------|----------------------|-------------|-----------------------------|-----------------|------------------|-----------------|-------|
| | | | | | | Swivel | Rigid |
| 3" Diameter Wheels | | | | | | | |
| SSRT-3150-BAL-DEL | SSRTR-3150-BAL-DEL | 1-1/2" | Phenolic | 500 | Delrin | 4.0 | 3.0 |
| SSRT-3150C-ES-DEL | SSRTR-3150C-ES-DEL | 1-1/2" | Solid Elastomer (Crowned) | 350 | Delrin | 4.0 | 3.0 |
| SSRT-3150-NY-DEL | SSRTR-3150-NY-DEL | 1-1/2" | White Nylon | 500 | Delrin | 4.0 | 3.0 |
| SSRT-3200-BAL-DEL* | SSRTR-3200-BAL-DEL* | 2" | Phenolic | 600 | Delrin | 4.0 | 3.0 |
| SSRT-3200-NY-DEL | SSRTR-3200-NY-DEL | 2" | White Nylon | 600 | Delrin | 4.0 | 3.0 |
| 4" Diameter Wheels | | | | | | | |
| SSRT-4150-BAL-DEL | SSRTR-4150-BAL-DEL | 1-1/2" | Phenolic | 500 | Delrin | 4.0 | 3.5 |
| SSRT-4150-HT-SSRB | SSRTR-4150-HT-SSRB | 1-1/2" | Hi-Temp Phenolic | 400 | Stainless Roller | 4.0 | 3.5 |
| SSRT-4150-UN-DEL | SSRTR-4150-UN-DEL | 1-1/2" | Star-Tech Urethane | 440 | Delrin | 4.0 | 3.5 |
| SSRT-4150C-ES-DEL | SSRTR-4150C-ES-DEL | 1-1/2" | Solid Elastomer (Crowned) | 400 | Delrin | 4.5 | 4.0 |
| SSRT-4150-EL-DEL | SSRTR-4150-EL-DEL | 1-1/2" | Eliminator Grey Rubber | 350 | Delrin | 4.0 | 3.5 |
| SSRT-4150-NL-DEL | SSRTR-4150-NL-DEL | 1-1/2" | Ny-Lite | 420 | Delrin | 4.0 | 3.5 |
| SSRT-4150-NY-DEL | SSRTR-4150-NY-DEL | 1-1/2" | White Nylon | 500 | Delrin | 4.0 | 3.5 |
| SSRT-4200-BAL-DEL | SSRTR-4200-BAL-DEL | 2" | Phenolic | 600 | Delrin | 4.5 | 4.0 |
| SSRT-4200-HT-SSRB | SSRTR-4200-HT-SSRB | 2" | Hi-Temp Phenolic | 500 | Stainless Roller | 4.5 | 4.0 |
| SSRT-4200-SSMS-SSRB | SSRTR-4200-SSMS-SSRB | 2" | Stainless Steel | 600 | Stainless Roller | 12.0 | 11.5 |
| SSRT-4200-UN-DEL | SSRTR-4200-UN-DEL | 2" | Star-Tech Urethane | 600 | Delrin | 4.0 | 3.5 |
| SSRT-4200C-UBA-PBB | SSRTR-4200C-UBA-PBB | 2" | Urethane on Alum. (Crowned) | 600 | Precision Ball | 5.0 | 4.5 |
| SSRT-4200C-MBA-PBB | SSRTR-4200C-MBA-PBB | 2" | Megabest (Crowned) | 300 | Precision Ball | 5.0 | 4.5 |
| SSRT-4200C-ES-DEL | SSRTR-4200C-ES-DEL | 2" | Solid Elastomer (Crowned) | 600 | Delrin | 4.5 | 4.0 |
| SSRT-4200-EL-DEL | SSRTR-4200-EL-DEL | 2" | Eliminator Grey Rubber | 600 | Delrin | 4.0 | 3.5 |
| SSRT-4200-NL-DEL | SSRTR-4200-NL-DEL | 2" | Ny-Lite | 500 | Delrin | 4.0 | 3.5 |
| SSRT-4200-NY-DEL | SSRTR-4200-NY-DEL | 2" | White Nylon | 600 | Delrin | 4.5 | 4.0 |

| Swivel Model Number | Rigid Model Number | Tread Width | Wheel Type | Capacity (lbs.) | Bearing Type | Weight (Approx) Swivel | Weight (Approx) Rigid |
|---------------------------|----------------------|-------------|-----------------------------|-----------------|------------------|------------------------|-----------------------|
| 5" Diameter Wheels | | | | | | | |
| SSRT-5150-BAL-DEL | SSRTR-5150-BAL-DEL | 1-1/2" | Phenolic | 500 | Delrin | 5.0 | 4.0 |
| SSRT-5150-UN-DEL | SSRTR-5150-UN-DEL | 1-1/2" | Star-Tech Urethane | 500 | Delrin | 4.5 | 3.5 |
| SSRT-5150C-ES-DEL | SSRTR-5150C-ES-DEL | 1-1/2" | Solid Elastomer (Crowned) | 500 | Delrin | 5.0 | 4.0 |
| SSRT-5150-EL-DEL | SSRTR-5150-EL-DEL | 1-1/2" | Eliminator Grey Rubber | 400 | Delrin | 4.5 | 3.5 |
| SSRT-5150-NL-DEL | SSRTR-5150-NL-DEL | 1-1/2" | Ny-Lite | 500 | Delrin | 4.5 | 3.5 |
| SSRT-5150-NY-DEL | SSRTR-5150-NY-DEL | 1-1/2" | White Nylon | 500 | Delrin | 5.0 | 4.0 |
| SSRT-5200-BAL-DEL | SSRTR-5200-BAL-DEL | 2" | Phenolic | 600 | Delrin | 5.5 | 4.5 |
| SSRT-5200-HT-SSRB | SSRTR-5200-HT-SSRB | 2" | Hi-Temp Phenolic | 600 | Stainless Roller | 5.5 | 4.5 |
| SSRT-5200-UN-DEL | SSRTR-5200-UN-DEL | 2" | Star-Tech Urethane | 600 | Delrin | 5.0 | 4.0 |
| SSRT-5200C-UBA-PBB | SSRTR-5200C-UBA-PBB | 2" | Urethane on Alum. (Crowned) | 600 | Precision Ball | 5.5 | 4.5 |
| SSRT-5200C-MBA-PBB | SSRTR-5200C-MBA-PBB | 2" | Megabest (Crowned) | 300 | Precision Ball | 5.5 | 4.5 |
| SSRT-5200C-ES-DEL | SSRTR-5200C-ES-DEL | 2" | Solid Elastomer (Crowned) | 600 | Delrin | 5.0 | 4.0 |
| SSRT-5200-EL-DEL | SSRTR-5200-EL-DEL | 2" | Eliminator Grey Rubber | 600 | Delrin | 5.0 | 4.0 |
| SSRT-5200-NL-DEL | SSRTR-5200-NL-DEL | 2" | Ny-Lite | 600 | Delrin | 5.0 | 4.0 |
| SSRT-5200-NY-DEL | SSRTR-5200-NY-DEL | 2" | White Nylon | 600 | Delrin | 5.0 | 4.0 |
| 6" Diameter Wheels | | | | | | | |
| SSRT-6150-BAL-DEL | SSRTR-6150-BAL-DEL | 1-1/2" | Phenolic | 600 | Delrin | 5.5 | 4.5 |
| SSRT-6150-UN-DEL | SSRTR-6150-UN-DEL | 1-1/2" | Star-Tech Urethane | 600 | Delrin | 5.0 | 4.0 |
| SSRT-6150-EL-DEL | SSRTR-6150-EL-DEL | 1-1/2" | Eliminator Grey Rubber | 500 | Delrin | 5.0 | 4.0 |
| SSRT-6150-NL-DEL | SSRTR-6150-NL-DEL | 1-1/2" | Ny-Lite | 600 | Delrin | 4.5 | 3.5 |
| SSRT-6150-NY-DEL | SSRTR-6150-NY-DEL | 1-1/2" | White Nylon | 600 | Delrin | 5.0 | 4.0 |
| SSRT-6200-BAL-DEL | SSRTR-6200-BAL-DEL | 2" | Phenolic | 600 | Delrin | 6.5 | 5.5 |
| SSRT-6200-HT-SSRB | SSRTR-6200-HT-SSRB | 2" | Hi-Temp Phenolic | 600 | Stainless Roller | 6.5 | 5.5 |
| SSRT-6200-SSMS-SSRB | SSRTR-6200-SSMS-SSRB | 2" | Stainless Steel | 600 | Stainless Roller | 23.5 | 22.5 |
| SSRT-6200-UN-DEL | SSRTR-6200-UN-DEL | 2" | Star-Tech Urethane | 600 | Delrin | 5.5 | 4.5 |
| SSRT-6200C-UBA-PBB | SSRTR-6200C-UBA-PBB | 2" | Urethane on Alum. (Crowned) | 600 | Precision Ball | 6.5 | 5.5 |
| SSRT-6200C-MBA-PBB | SSRTR-6200C-MBA-PBB | 2" | Megabest (Crowned) | 400 | Precision Ball | 6.5 | 5.5 |
| SSRT-6200-ES-DEL | SSRTR-6200-ES-DEL | 2" | Solid Elastomer | 600 | Delrin | 6.0 | 5.0 |
| SSRT-6200C-ES-DEL | SSRTR-6200C-ES-DEL | 2" | Solid Elastomer (Crowned) | 600 | Delrin | 6.0 | 5.0 |
| SSRT-6200C-EG-PBB | SSRTR-6200C-EG-PBB | 2" | Elastiglide (Crowned) | 600 | Precision Ball | 6.5 | 5.5 |
| SSRT-6200-EL-DEL | SSRTR-6200-EL-DEL | 2" | Eliminator Grey Rubber | 600 | Delrin | 5.5 | 4.5 |
| SSRT-6200-NL-DEL | SSRTR-6200-NL-DEL | 2" | Ny-Lite | 600 | Delrin | 5.0 | 4.0 |
| SSRT-6200-NY-DEL | SSRTR-6200-NY-DEL | 2" | White Nylon | 600 | Delrin | 5.5 | 4.5 |
| 8" Diameter Wheels | | | | | | | |
| SSRT-8200-BAL-DEL | SSRTR-8200-BAL-DEL | 2" | Phenolic | 700 | Delrin | 7.5 | 7.0 |
| SSRT-8200-HT-SSRB | SSRTR-8200-HT-SSRB | 2" | Hi-Temp Phenolic | 700 | Stainless Roller | 7.5 | 7.0 |
| SSRT-8200-UN-DEL | SSRTR-8200-UN-DEL | 2" | Star-Tech Urethane | 700 | Delrin | 6.0 | 5.5 |
| SSRT-8200C-UBA-PBB | SSRTR-8200C-UBA-PBB | 2" | Urethane on Alum. (Crowned) | 700 | Precision Ball | 8.5 | 8.0 |
| SSRT-8200C-MBA-PBB | SSRTR-8200C-MBA-PBB | 2" | Megabest (Crowned) | 500 | Precision Ball | 9.0 | 8.5 |
| SSRT-8200-ES-DEL | SSRTR-8200-ES-DEL | 2" | Solid Elastomer | 700 | Delrin | 7.0 | 6.5 |
| SSRT-8200C-ES-DEL | SSRTR-8200C-ES-DEL | 2" | Solid Elastomer (Crowned) | 700 | Delrin | 8.5 | 8.0 |
| SSRT-8200C-EG-PBB | SSRTR-8200C-EG-PBB | 2" | Elastiglide (Crowned) | 700 | Precision Ball | 9.0 | 8.5 |
| SSRT-8200-EL-DEL | SSRTR-8200-EL-DEL | 2" | Eliminator Grey Rubber | 700 | Delrin | 6.0 | 5.5 |
| SSRT-8200-NL-DEL | SSRTR-8200-NL-DEL | 2" | Ny-Lite | 700 | Delrin | 5.5 | 5.0 |
| SSRT-8200-NY-DEL | SSRTR-8200-NY-DEL | 2" | White Nylon | 700 | Delrin | 6.5 | 6.0 |

- Options:** (1) Pedal Brake available on swivels and rigids. Add code 'BR' to model number (eg. SSRT/BR-8200-BAL-DEL)
 (2) Flanged Brass Bearing. Substitute 'BF' for 'DEL' in Model Number (eg. SSRT-6200-NY-BF)
 (3) Stainless Steel Roller Bearing. Substitute 'SSRB' for 'DEL' in Model Number (eg. SSRT-6200-NY-SSRB)
 (4) Stainless Steel Precision Ball Bearing. Substitute 'SSPBB' for 'PBB' in Model Number (eg. SSRT-8200C-EG-SSPBB)
 (5) Custom stems available. Consult Factory.

Notes: Listed capacities are for casters only (without stems). Some stems may reduce the above listed capacities. Consult Factory.

SSRT/SSRTR SERIES STANDARD STEMS

| Stem Model Number | Stem Type | Stem Material | Stem Weight (Approx.) |
|------------------------------|----------------|-----------------|-----------------------|
| SSRT STEM: 3/4" X 4" PS | PLAIN STEM | STAINLESS STEEL | 0.75 |
| SSRT STEM: 7/8" X 4" PS | PLAIN STEM | STAINLESS STEEL | 1.00 |
| SSRT STEM: 1" X 4" PS | PLAIN STEM | STAINLESS STEEL | 1.25 |
| SSRT STEM: 1-3/8" X 4" PS | PLAIN STEM | STAINLESS STEEL | 2.50 |
| SSRT STEM: .845" X 2-1/2" SC | STEM & CIRCLIP | STAINLESS STEEL | 0.75 |
| SSRT STEM: 7/8" X 2" SC | STEM & CIRCLIP | STAINLESS STEEL | 0.75 |
| SSRT STEM: 3/4"-10 X 2" TS | THREADED STEM | STAINLESS STEEL | 0.50 |
| SSRT STEM: 3/4"-10 X 4" TS | THREADED STEM | STAINLESS STEEL | 0.75 |
| SSRT STEM: 1"-8 X 4" TS | THREADED STEM | STAINLESS STEEL | 1.25 |

- Notes:** Specific stem selections may result in reduced overall caster capacities. Consult Factory.
 Stems are intended to mount the caster flush with the mounting surface and must not be used for load levelling purposes.