

PRIORITY™ models feature a white nylon wheel with a sealed precision bearing. The swivel section features a sealed precision bearing for easier swivel action. **PRIORITY ECONOMY™** with black polypropylene wheels give dependability on a budget.

STANDARD FEATURES & BENEFITS


Swivel Section - Sealed precision ball bearings in swivel section and wheel on Priority models **Ball Bearing** - Semi-precision unsealed ball bearings on Economy models **Construction** - 1/8" formed steel construction **Thread Guards** - White nylon thread guards for Priority models (Black polypropylene thread guards for Priority Economy models) **Wheel** - Shock resistant wheels **Finish**- Zinc plated finish

SELECT OPTIONS

Nylon Glass Filled Toe Guard Easily installed in the field. Toe guards fit all air cargo casters except integral toe guard models and are rated at 300 lbs (see photo below).

SELECT APPLICATIONS

Cargo Conveyor Equipment

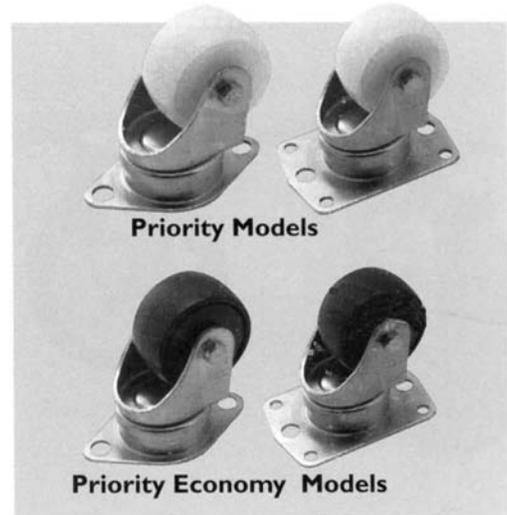

PRIORITY AIR CARGO CASTERS


capacity to 450 lbs

WHEEL DIAMETER- (INCHES)	TREAD- WIDTH (INCHES)	WHEEL TYPE	WHEEL BEARING	CAPACITY (LBS)	OVERALL HEIGHT	APPROX. WEIGHT (LBS)	CASTER NUMBER
DIAMOND PLATE • ZINC PLATED FINISH							
2.25 (58mm)	1.34 (34mm)	Nylon (White)	Sealed Precision Ball	450	3.78" (96mm)	1.75	03PR02028S
2.75 (70mm)	1.34 (34mm)	Nylon (White)	Sealed Precision Ball	450	4.03" (102mm)	1.75	03PR03028S
RECTANGULAR PLATE • ZINC PLATED FINISH							
2.25 (58mm)	1.34 (34mm)	Nylon (White)	Sealed Precision Ball	450	3.78" (96mm)	1.75	03PR02028S004
2.75 (70mm)	1.34 (34mm)	Nylon (White)	Sealed Precision Ball	450	4.03" (102mm)	1.75	03PR03028S004


PRIORITY ECONOMY AIR CARGO CASTERS

DIAMOND PLATE • ZINC PLATED FINISH							
2.25 (58mm)	1.34 (34mm)	Polypropylene (Black)	Semi-Precision Ball	450	3.78" (96mm)	1.75	03PE02028S
2.75 (70mm)	1.34 (34mm)	Polypropylene (Black)	Semi-Precision Ball	450	4.03" (102mm)	1.75	03PE03028S
RECTANGULAR PLATE • ZINC PLATED FINISH							
2.25 (58mm)	1.34 (34mm)	Polypropylene (Black)	Semi-Precision Ball	450	3.78" (96mm)	1.75	03PE02028S004
2.75 (70mm)	1.34 (34mm)	Polypropylene (Black)	Semi-Precision Ball	450	4.03" (102mm)	1.75	03PE03028S004

Diamond Plate Model

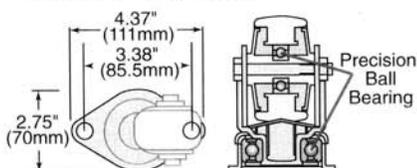

Rectangular Plate Model



INVERTED CASTERS

13

PRIORITY PREMIER™ models are built with both the wheel and swivel section having sealed precision ball bearings for longer life and smoother operation even under harsh conditions.



STANDARD FEATURES & BENEFITS

Swivel Section - Sealed precision ball bearing in swivel section
Wheel Bearing - Sealed precision ball bearings in wheel
Construction - 1/8" formed steel construction **Seal** - Additional O-ring seal in swivel section prevents contamination **Wheel** - Shock resistant premium nylon wheels **Finish** - Zinc plated finish on diamond plate models; yellow dichromate finish on rectangular plate models **Thread Guards** - Metal thread guards

SELECT OPTIONS

Integral Toe Guard Optional integral toe guard on 2.25" models (See chart below)



Nylon Glass Filled Toe Guard Easily installed in the field. Toe guards fit all air cargo casters except integral toe guard models and are rated at 300 lbs (see photo below).

SELECT APPLICATIONS



Cargo Conveyor Equipment

WHEEL DIAMETER- (INCHES)	TREAD-WIDTH (INCHES)	WHEEL TYPE	WHEEL BEARING	CAPACITY (LBS)	OVERALL HEIGHT	APPROX. WEIGHT (LBS)	CASTER NUMBER
DIAMOND PLATE • ZINC PLATED FINISH							
2.25 (58mm)	1.34 (34mm)	Premium Nylon (White)	Sealed Precision Ball	450	3.78" (96mm)	1.75	03XN02028S
2.75 (70mm)	1.34 (34mm)	Premium Nylon (White)	Sealed Precision Ball	450	4.03" (102mm)	1.75	03XN03028S
RECTANGULAR PLATE • YELLOW DICHROMATE FINISH							
2.25 (58mm)	1.34 (34mm)	Premium Nylon (White)	Sealed Precision Ball	450	3.78" (96mm)	1.75	03XN02028S004
2.75 (70mm)	1.34 (34mm)	Premium Nylon (White)	Sealed Precision Ball	450	4.03" (102mm)	1.75	03XN03028S004
RECTANGULAR PLATE INTEGRAL METAL TOE GUARD • YELLOW DICHROMATE FINISH							
2.25 (58mm)	1.34 (34mm)	Premium Nylon (White)	Sealed Precision Ball	450	3.78" (96mm)	1.75	03XN02028S001

Diamond Plate Model



Rectangular Plate Model



Field Installable Toe Guard



Specify TO-106

Specify TO-120

Specify TO-145

3/8" Plate Bolt Holes (Center holes)

5/16" Plate Bolt Holes (Corner holes)