

# SERIES

## Dual Wheel Piano Casters




Load Capacity: 160 to 230 lbs.

### Quality Features

- FOUR-SIDED, DOUBLE BALL RACEWAY.**  
 Hardened steel ball bearings touch upper and lower swivel raceway "on all four sides." This protects the pin from shock loading for free swiveling under heavy loads.
- HEAT-TREATED MOVING PARTS.**  
 All moving parts are hardened to a precise molecular depth and Rockwell hardness. This extends caster life under rugged conditions and shock loads.
- RACEWAY DUST CAP.**  
 Dust cap protects the raceway from contamination by dust, dirt, moisture, and other environmental debris. While standard on 50 series casters, these are usually not available on most competitive brands.
- LOW OVERALL HEIGHT.**  
 Heavy pianos are supported by two wheels that roll independently to assure easy maneuverability on any floor surface.


### STEMS

#### "O" STEM TABLE




| Dimension D | Dimension L | Stem Number |
|-------------|-------------|-------------|
| 3/8"        | 1"          | O40-38-1    |
| 3/8"        | 1-1/4"      | O40-38-114  |
| 7/16"       | 1"          | O40-716-1   |
| 7/16"       | 1-1/4"      | O40-716-114 |
| 7/16"       | 1-1/2"      | O40-716-112 |

Other stem sizes and dimensions available.



Standard piano stem to fit sockets below stem. Subtract .125" from overall height for stem casters.

### FOUR SIDED DOUBLE BALL BEARING RACEWAY- 40 SERIES

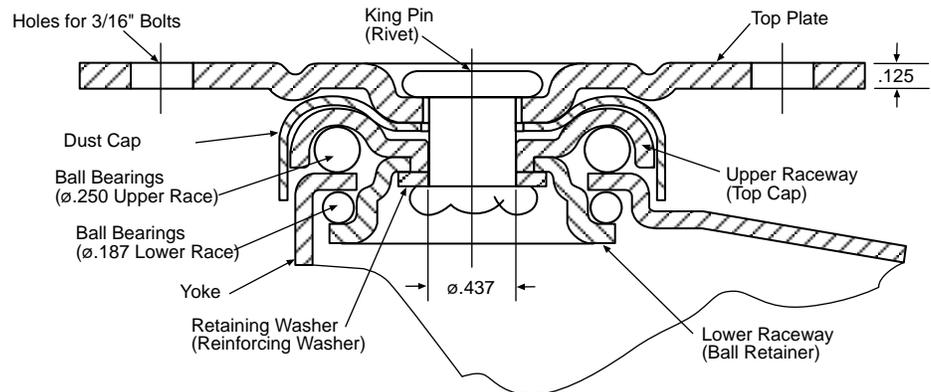

Acorn Industrial Products Co  
 520 Hertzog Boulevard  
 King of Prussia, PA 19406  
 Phone 800-523-5474  
 Fax 800-782-6780  
 E-Mail acorn@acornindprod.com  
 www.acornindprod.com

### Wheel Selection

#### NEOPRENE RUBBER



#### HI-CAP NEOPRENE




#### HARD RUBBER




### SOCKETS







#### ROUND BASE SOCKET



#### SQUARE BASE SOCKET



# TOP PLATE

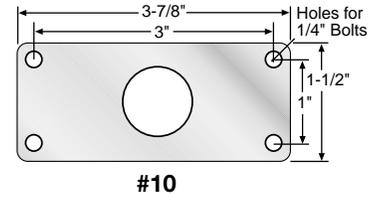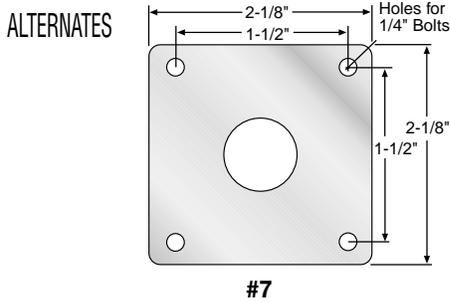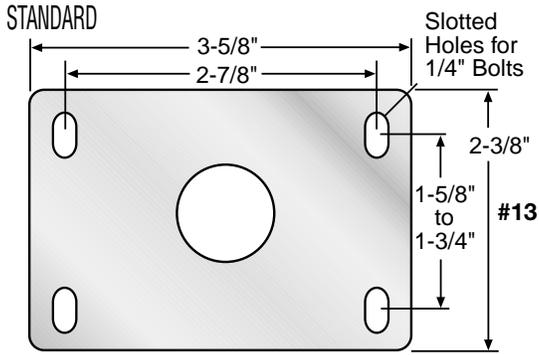

| Diameter | Tread Width | Load Capacity | Wheel Material  | Bearing    | Swivel Part Number | Rigid Part Number | Approx. Weight | Overall Height | Swivel Radius |          |     |
|----------|-------------|---------------|-----------------|------------|--------------------|-------------------|----------------|----------------|---------------|----------|-----|
| <b>2</b> | <b>3/4</b>  | <b>160</b>    | NEOPRENE RUBBER | ACETAL     | 40-O-PDN           | N/A               | 1              | 3              | 1-15/16       |          |     |
|          |             |               |                 | BALL       | 40-O-XDN           | N/A               |                |                |               |          |     |
|          |             |               |                 | ACETAL     | 40-13-PDN          | N/A               |                |                |               |          |     |
|          |             |               |                 | BALL       | 40-13-XDN          | N/A               |                |                |               |          |     |
|          |             |               |                 | ACETAL     | 40-O-PKN           | N/A               |                |                |               |          |     |
|          |             |               |                 | BALL       | 40-O-XKN           | N/A               |                |                |               |          |     |
|          |             | <b>200</b>    | HI-CAP NEOPRENE | ACETAL     | 40-13-PKN          | N/A               |                |                |               |          |     |
|          |             |               |                 | BALL       | 40-13-XKN          | N/A               |                |                |               |          |     |
|          |             |               |                 | <b>230</b> | HARD RUBBER        | ACETAL            |                |                |               | 40-O-PH  | N/A |
|          |             |               |                 |            |                    | BALL              |                |                |               | 40-O-XH  | N/A |
|          |             |               |                 |            |                    | ACETAL            |                |                |               | 40-13-PH | N/A |
|          |             |               |                 |            |                    | BALL              |                |                |               | 40-13-XH | N/A |

## Additional Single Wheel Piano Casters

7 SERIES  
WITH SOLID BRASS WHEEL



52 SERIES  
WITH BLACK OXIDE FINISH



Acorn Industrial Products Co  
520 Hertzog Boulevard  
King of Prussia, PA 19406  
Phone 800-523-5474  
Fax 800-782-6780  
E-Mail [acorn@acornindprod.com](mailto:acorn@acornindprod.com)  
[www.acornindprod.com](http://www.acornindprod.com)