


M-2000 SERIES ROLLING SAFETY LADDERS

- **450 lbs. capacity**
- Easy to use footpedal activated lockstep
- High quality casters with bearing and dust cover
- 14" deep top step
- Ladders ship knocked-down for freight savings
- Fully assembled ladders available - specify (SU) set-up
- Expanded metal tread standard or specify alternate tread
- Manufactured with rigid 1" OD tubing
- 30" high handrails
- 21" and 28" deep top step available
- Gray powdercoat finish
- Built to OSHA and ANSI standards
- CAL OSHA available

STEPS INCLUDING TOP STEP	HEIGHT INCHES		MODEL #	BASE W" x L"	WGT lbs.
	TOP STEP	OVER ALL			
16" WIDE STEP WITH 24" WIDE BASE					
5 STEP	50	83	052414	24 x 43	91
6 STEP	60	93	062414	24 x 49	100
7 STEP	70	103	072414	24 x 55	109
8 STEP	80	113	082414	24 x 61	127
24" WIDE STEP WITH 30" - 40" WIDE BASE					
5 STEP	50	83	053214	32 x 43	110
6 STEP	60	93	063214	32 x 49	122
7 STEP	70	103	073214	32 x 55	143
8 STEP	80	113	083214	32 x 61	160
9 STEP	90	123	093214	32 x 68	175
10 STEP	100	133	103214	32 x 74	193
11 STEP	110	143	113214	32 x 80	205
12 STEP	120	153	123214	32 x 87	220
13 STEP*	130	172	134014	40 x 94	250
14 STEP*	140	182	144014	40 x 100	280
15 STEP*	150	192	154014	40 x 106	310

*Must be skidded. See price sheet for skidding cost.


**EXPANDED METAL
STANDARD OR SPECIFY
ALTERNATE TREAD
WHEN ORDERING**



Perforated Tread (P)



Expanded Metal Tread (X)




Heavy Duty Serrated Grating (G)



Abrasive Mat Tread (R)

**21" and 28"
DEEP TOP STEP
AVAILABLE
ALL MODELS**

21" and 28"
DTS include heavy
duty cardboard
boxes for
shipping.

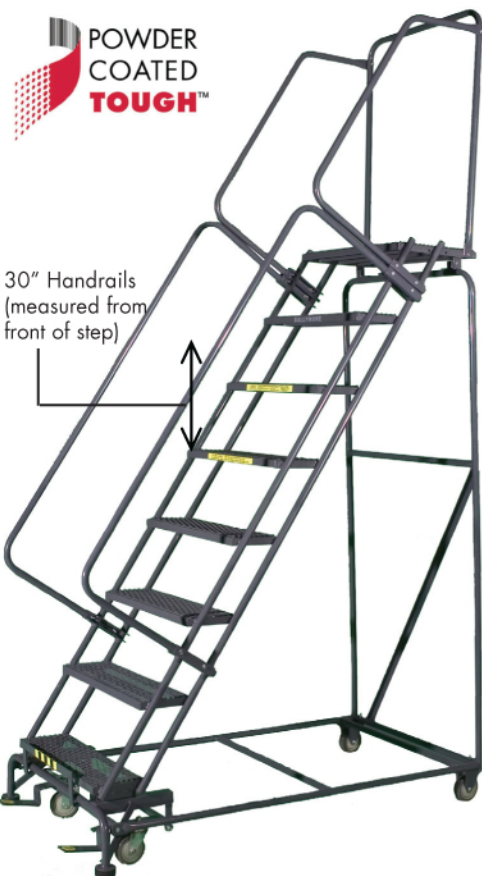

**Heavy
Duty
Easy
Operating
Lockstep**




HOW TO SELECT THE PROPER LADDER

Shipping:

- Ladders ship unassembled for lowest risk of freight damage.
- Step by step assembly instructions with detailed diagrams included.
- 16-20 step ladders available - call for specifications and pricing
- For high reach applications, consider Ballymore's affordable personnel lifts.
- Boxing available for extra protection on most models.



1. Consider the best material and tread design for your needs
2. Review specialty ladders for unique requirements
3. Select platform height based on operations to be performed or weight and bulk of object to be carried. Maximum convenient working height is generally 5 - 6 feet above the top step or platform
4. Minimum ceiling height should be 6 - 7 feet above the top step or platform
5. In larger ladders, choose a wide ladder over a narrow one if space permits. For very bulky loads, consider a stairway slope ladder and/or deeper top steps
6. Take into account whether people must pass the ladder in aisles and where it must rest when not in use
7. Consider limitations on ladder dimensions imposed by doorways, overhead obstructions, corners to be turned, etc.
8. Trays and shelves are available to hold merchandise while on ladder
9. For unusual conditions or applications, please call for recommendations

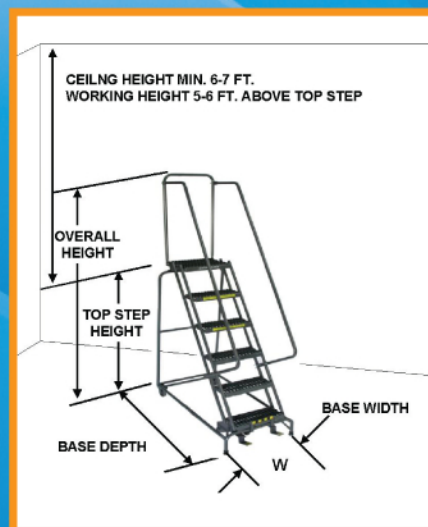

Ladders are in Stock in IL, GA, TX, CA, PA

Acorn Industrial Products Co

520 Hertzog Boulevard, King of Prussia, PA 19406

Phone 800-523-5474 | Fax 800-782-6780 | E-Mail acorn@acornindprod.com

Ballymore
SAFETY LADDERS